

FFCH SERIES

Commercial Downflow Ceiling Heater

CEILING HEATERS



Technical Specifications:


Temp Range: 45°-90°F

CFM: 300


Grille Gauge: 20

Ideal Spaces:

Bathrooms
Offices
Conference Rooms
Lobbies
Waiting Rooms
Entrance Ways



White



Navajo White

- › FFCHSE “surface enclosures” are designed to mount flat on the ceiling and extend only 6 in. into the room
- › FFCHRE “recessed enclosures” have no protrusions outside recess box, allowing the heater to recess only 7 in. into ceiling space. Mounts in T-Bar or permanent ceiling with trim ring
- › 208V and 240V heaters can be field-converted from single- to three-phase operation. 5,000-watt heater can be field-converted to 3,800 or 2,500 watts and 4,000-watt heater to 3,000 or 2,000 watts
- › BMS-compatible with use of relays
- › Three adjustable airflow patterns from 14 ft. ceilings: wide, narrow or asymmetrical patterns
- › Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- › Automatic thermal cutout: shuts off the heater in the event of over-heating and reactivates heater when temperature returns to normal
- › Easy installation: Thumb pins align and temporarily hold enclosure cover to heating section freeing both hands to finish installation



FFCH SERIES

Commercial Downflow Ceiling Heater

Scan the QR code
to access additional
specs and features



Models & Specifications:

ITEM INFORMATION				ELECTRICAL DATA					
CATALOG NO.	UPC	MOUNTING	KW	BTU/HR.	AMPS	VOLTS	PHASE	SHIP WT.	
◆ FFCH548	685360026527	Heater Section Only	4/3/2	13.7/10.2/6.8	19.2/14.2/9.6	208	1-3	27 lbs	
◆ FFCH542	685360026503	Heater Section Only	4/3/2	13.7/10.2/6.8	16.7/12.5/8.3	240	1-3	27 lbs	
◆ FFCH547	685360026510	Heater Section Only	4/3/2	13.7/10.2/6.8	14.4/10.8/7.2	277	1	27 lbs	
◆ FFCH558	685360026558	Heater Section Only	5/3.8/2.5	17.1/13/8.5	24/18.3/12	208	1-3	27 lbs	
◆ FFCH552	685360026534	Heater Section Only	5/3.8/2.5	17.1/13/8.5	20.8/15.8/10.4	240	1-3	27 lbs	
◆ FFCH557	685360026541	Heater Section Only	5/3.8/2.5	17.1/13/8.5	18.1/13.7/9	277	1	27 lbs	



SKU Legend: ◆ = Popular Products; ● = Extended Offering (Contact your local Marley Sales Representative for typically associated lead times)

Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION	SHIP WT.
FFCHSE	685360026435	Surface-mounted enclosure (Navajo White) — to be used With above heater section. 20" L x 16 1/2" W x 5 3/4" D	10 lbs
FFCHRE	685360026404	Recessed-mounted enclosure (Navajo White) — to be used With above heater section. 23 3/4" L x 23 3/4" W x 7" D	18 lbs
FFCHSEW	685360149625	Surface-mounted White — to be used With above heater section. 20" L x 16 1/2" W x 5 3/4" D	10 lbs
FFCHRENW	685360149646	Recessed-mounted White — to be used With above heater section. 23 3/4" L x 23 3/4" W x 7" D	18 lbs
FFCHT	685360026459	Integral thermostat SPST — Range 45 to 95°F	1 lbs
FFCH24R	685360026497	Relay (Time Delay 45-60 sec. to close when energized) requires 24V supply from remote source	1 lbs
FFCHR12	685360026428	Relay (Time Delay 45-60 sec. to close when energized) requires 120V supply from remote source	1 lbs
FFCHDS_R	685360174976	Recessed Mount Power Disconnect Switch (3-Pole) 30 amps, 600 volts, 3Ø, 60 Hz	1 lbs
FFCHDS_S	685360174969	Surface Mount Power Disconnect Switch (3-Pole) 30 amps, 600 volts, 3Ø, 60 Hz	1 lbs
FFCHTK	685360026466	Trim Ring for mounting on permanent ceiling (cannot be factory installed)	1 lbs
FFCHTR4	685360026473	208/240V Primary Transformer/24V sec. and 24V holding coil control relay	1 lbs
FFCHTR7	685360026480	277V Primary Transformer/24V sec. and 24V holding coil control relay	1 lbs
FFCHRFK	685360171555	Mounting Bracket Retrofit Kit	2.5 lbs

NOTE: Factory-wired for highest wattage, field-convertible to lower wattages. Factory-wired 1-PH, field convertible to 3-PH dual-phase units, maximum amp draw is listed. Amperage shown is for single phase. For factory installation of above controls, additional charges apply.


Dimensions and Clearances:

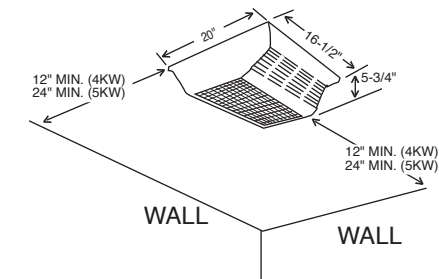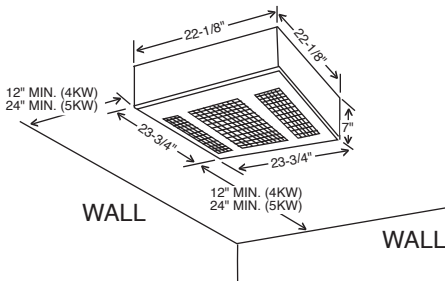

Adjustable Airflow Options:


Wide Pattern

(24x8 ft. coverage)
In standard ceiling applications (8-10 ft.), heater disperses the air to give a gentle, less pronounced pattern while circulating all the air from floor to ceiling.



Narrow Pattern

(8x8 ft. coverage)
For high ceiling applications (11-14 ft.), fan concentrates the heated air to ensure full penetration to the floor level.



Asymmetrical Pattern

(17x10 ft. coverage)
Heated air is directed in a specific direction, allowing the heater to be located where space allows, with the heated air delivered to where it is required.

