


# MFQ SERIES

## High Output Commercial Fan-Forced Wall Heater

# WALL HEATERS

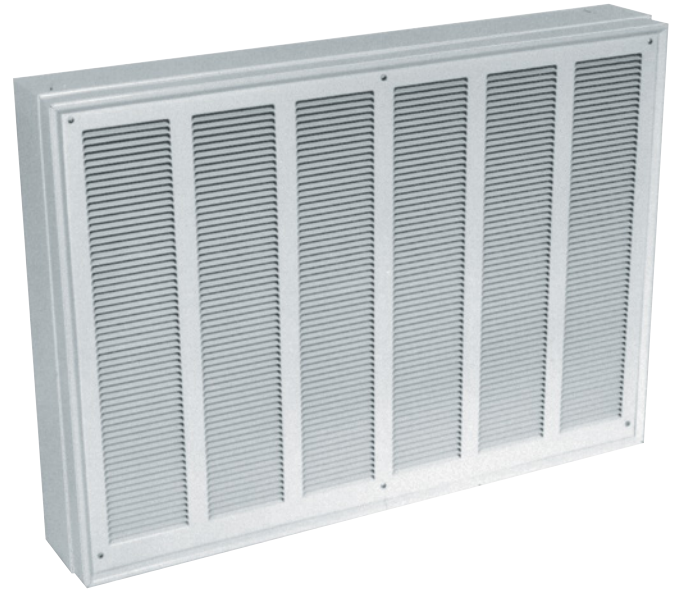

### Technical Specifications:


Temp Range: 60°-90°F

CFM: 200

Grille Gauge: 18

### Ideal Spaces:

Offices & Conference Rooms  
Stores, Schools & Churches  
Hospitals & Waiting Rooms  
Dormitories  
Airport Terminals  
Reception Rooms  
Lobbies, Corridors & Stairwells  
Hallways



White

- › Steel finned metal sheath electric heating elements with low sheath temperatures provided uniform heat and long service life
- › Rugged stamped steel front cover provides a down-flow air pattern Integral thermostat for quick installation; separate thermostat not necessary
- › Thermal overheat protectors disconnect power in event of accidental blockage
- › Power on/off switch for added safety during maintenance
- › Permanently lubricated enclosed fan motor provides long-life and low maintenance



# MFQ SERIES

## High Output Commercial Fan-Forced Wall Heater

Scan the QR code to access additional specs and features



### Models & Specifications:


ITEM INFORMATION		ELECTRICAL DATA							
CATALOG NO.	UPC	VOLTS	PHASE	WATTS	AMPS	BTU/HR.	BUILT-IN THERMOSTAT	SHIP WT.	
● MFQ6008	685360046877	208	1	6000	28.8	20,525	Yes	50 lbs	
● MFQ60048	685360046846	480	1	6000	12.5	20,525	Yes	50 lbs	
● MFQ8008	685360046938	208	1	8000	38.5	27,368	Yes	50 lbs	
● MFQ8004	685360046891	240	1	8000	33.3	27,368	Yes	50 lbs	
● MFQ80048	685360046907	480	1	8000	16.7	27,368	Yes	50 lbs	

SKU Legend: ● = Popular Products; ● = Extended Offering (Contact your local Marley Sales Representative for typically associated lead times)

### Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION	COLOR	SHIP WT.
MFQSM	685360046792	Surface Mounting Frame	White	6 lbs
MFQS1	685360046808	1 in. Semi-Recess Frame	White	5 lbs
MFQS2	685360046815	2 in. Semi-Recess Frame	White	6 lbs
MFQR24	685360046785	24V Power Relay	White	1 lbs
MFQR120	685360046778	120V Power Relay	White	1 lbs

### Dimensions and Clearances:

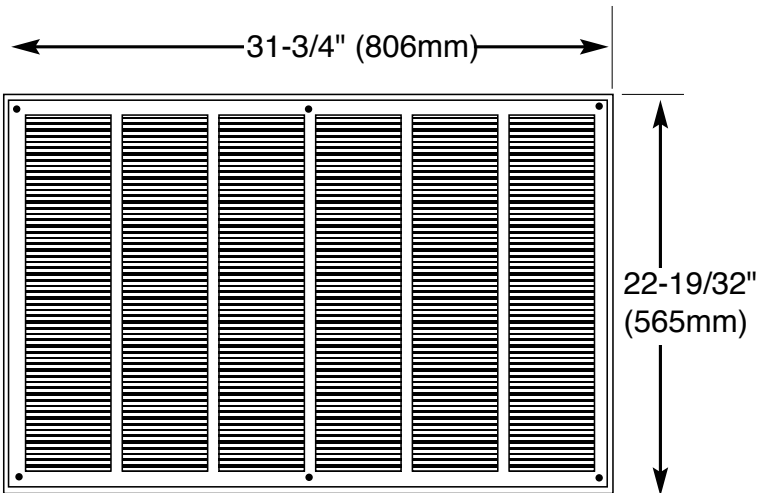

Back box dimensions 30-3/8" (771mm) wide x 21-1/4" (540mm) high x 3-3/4" (95mm) deep.