




470 Beauty Spot Rd. E
Bennettsville, SC 29512

SUBMITTAL SHEET
CWH3000 SERIES

**COMMERCIAL FAN-FORCED
LARGE WALL HEATER**

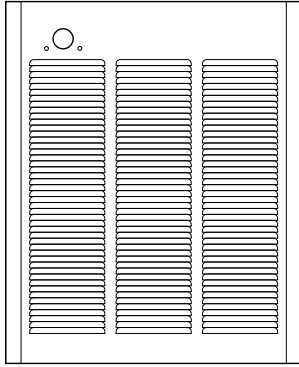

CAPACITIES
1500-4800 Watts
120, 208, 240, 277, 347 or 600V
1Ø or 3Ø
Thermostat Range: 40° - 90° F
Air Movement: 100 CFM

See Selection Chart for all Options

CWH3000 SERIES - COMMERCIAL FAN-FORCED LARGE WALL HEATER

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

SUBMITTED BY: _____ DATE: _____

TAG/ITEM	QTY.	CATALOG NUMBER	HEATER			AMPS	WEIGHT
			KW	VOLTS	Ø		

ACCESSORIES AND CONTROLS	TAG/ITEM	QTY.	CATALOG NUMBER	DESCRIPTION

SUBMITTED BY:	DATE

APPROVED BY:	DATE

CWH3000 SERIES | **ARCHITECT'S AND ENGINEER'S SPECIFICATIONS***

The heating equipment shall include an electric automatic fan forced air heater suitable for small area heating, as manufactured by QMark®, a Marley Engineered Products® Brand, Bennettsville, SC. The heater shall be designed for wall mounting, recess or surface. Heaters shall be cETLus listed.

BACK BOX: The back box shall be designed as a recessed rough-in box in either masonry or frame installations and is also used when surface mounting frames are used in surface mounting installations. The back box shall be heavy gauge galvanized steel and shall contain knockouts through which power leads enter.

INNER FRAME ASSEMBLY: The heater assembly, which fits into the back box, shall consist of a heavy gauge steel fan panel to which all of the operational parts of the heater are mounted. The inner frame assembly shall be completely prewired.

HEATING ELEMENT: The heating element shall be of the non-glowing design consisting of an 80/20 nickel-chromium resistance wire enclosed in a steel sheath to which plate fins are copper brazed. The element shall cover the entire air discharge area to ensure uniform heating of all discharged air. It shall be warrantied for 5 years.

ON/OFF SWITCH: A double-pole, single throw on/off switch shall be mounted on the back box for positive disconnect of power supply. It will be completely concealed behind the front cover.

MOTOR AND CONTROLS: The fan motor shall be totally enclosed, impedance protected, permanently lubricated and with a totally enclosed rotor. Fan control shall be of the bimetallic, snap-action type and shall activate fan after heating element reaches operating temperature, and continue to operate the fan after the thermostat is satisfied and until all heated air has been discharged. The thermostat shall be single-pole type on all models. Thermal cutout shall be bimetallic, snap-action type designed to shut off heat in the event of overheating. The fan shall be five-bladed aluminum.

SURFACE MOUNTING FRAME: The surface mounting frame shall be of heavy gauge steel designed to mount around the back box for a finished surface installation. Slot knockouts shall be provided for power supply conduit.

FRONT COVER: The louvered front cover shall be of heavy 20g steel with a powder paint finish. A plug button will be provided to replace the thermostat knob and render the unit tamper-resistant.

FINISH: All sheet metal parts, except the galvanized steel back box, shall be phosphatized, then completely painted by a powder paint process.

*QMark reserves the right to change specifications without prior notice.

Models & Specifications:


ITEM INFORMATION		ELECTRICAL DATA					SHIP WT.
CATALOG NO.	UPC	VOLTS	PHASE	WATTS	AMPS	BTU/HR.	
FRA1512F	685360162393	120	1	1500	12.5	5,118	25 lbs
FRA4024F*	685360162478	240	1	4000/2000	16.7/8.3	13,649/6,824	25 lbs
		208	1	3000/1500	14.5/7.2	10,236/5,118	25 lbs
FRA4027F*	685360162492	277	1	4000/2000	14.5/7.2	13,649/6,824	25 lbs
		240	1	3000/1500	12.5/6.3	10,236/5,118	25 lbs
FRA4020F*	685360162539	208	1	4000/2000	19.2/9.6	13,649/6,824	25 lbs
FRA4824F	685360162577	240	1	4800	20	16,378	25 lbs
		208	1	3600	17.3	12,284	25 lbs
FRA4827F	685360162591	277	1	4800	17.3	16,378	25 lbs
		240	1	3600	15	12,284	25 lbs
FRA48203F	685360162614	208	3	4800	13.4	16,378	25 lbs
FRA4820F	685360162638	208	1	4800	23.1	16,378	25 lbs
CWH3180F	685360162409	120	1	1800	15	6,142	25 lbs
CWH3307F*	685360162423	277	1	3000/1500	10.8/5.4	10,236/5,118	25 lbs
CWH34043F	685360162447	240	3	4000	9.7	13,649	25 lbs
CWH34083F	685360162508	208	3	4000	11.1	13,649	25 lbs
CWH35043F	685360162546	240	3	4800	11.6	16,378	25 lbs
CWH3153F	685360164229	347	1	1500	4.3	5,118	25 lbs
CWH3203F	685360164182	347	1	2000	5.8	6,824	25 lbs
CWH3303F	685360164267	347	1	3000	8.6	10,236	25 lbs
CWH3403F	685360164304	347	1	4000	11.5	13,649	25 lbs
CWH3503F	685360164342	347	1	4800	13.8	16,378	25 lbs
CWH3156F	685360164243	600	1	1500	2.5	5,118	25 lbs
CWH3206F	685360164205	600	1	2000	3.3	6,824	25 lbs
CWH3306F	685360164281	600	1	3000	5	10,236	25 lbs
CWH3406F	685360164328	600	1	4000	6.7	13,649	25 lbs
CWH3506F	685360164366	600	1	4800	8	16,378	25 lbs

*Factory-wired for higher wattage, field-convertible to half wattage. For wall mounting - Do not install back box closer than 8 in. from floor or adjacent wall. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where air flow may be obstructed.

Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION	COLOR	SHIP WT.
FRAFCTPF	685360027104	Tamper-Proof Front Cover	White	2 lbs
SMFL	685360174433	Surface Mounting Frame	White	5 lbs
SMFL1	685360174440	1 in. Semi-Recessed Frame	White	2 lbs
SMFL2	685360174457	2 in. Semi-Recessed Frame	White	2 lbs
VFKFSCNW	685360160801	14-gauge Security Front Cover	White	6 lbs

Dimensions and Clearances:

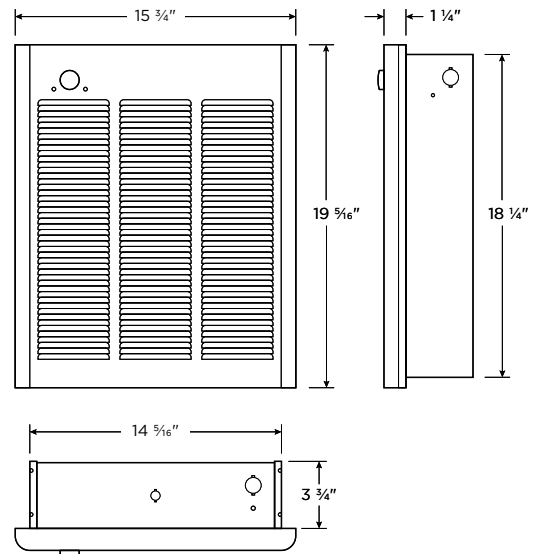

No matter the industry or application, Marley Engineered Products has a robust portfolio of innovative, reliable, high-performance comfort heating and ventilation solutions for all your heating needs.

For more information or assistance on your next project, contact Technical Services at 800-642-4328

Scan the QR code to access additional specs and features



Approvals: _____