


Electric Baseboard Heaters



Baseboard heaters are efficient because 100% of the heat generated is convected into the room. Individual room control means energy costs are lower than when central heat is wasted on unused rooms.

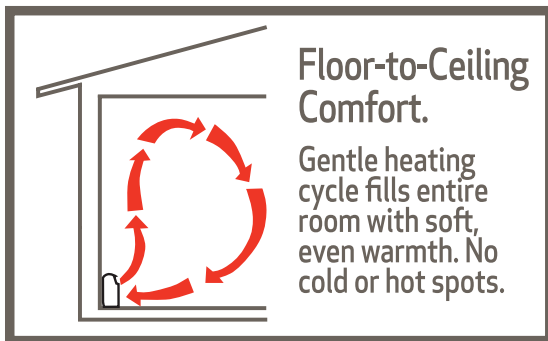

- ▶ **DURABLE TEXTURED POWDER COAT FINISH WITH LOW PROFILE DESIGN**
 - NORTHERN WHITE OR NAVAJO WHITE FINISH
- ▶ **HIGH TEMPERATURE SAFETY LIMIT**
 - ADDED PROTECTION IN CASE OF AIRFLOW BLOCKAGE
- ▶ **EASY INSTALLATION**
 - PRE-NOTCHED GUIDE MARKS IN REAR OF CABINET
 - BUILT-IN CABLE CLAMPS FOR FAST WIRING
 - POWER SUPPLY CAN BE CONNECTED AT EITHER END OF BASEBOARD
- ▶ **UL LISTED FOR INSTALLATION ON WALL OR LEVEL FLOOR SURFACE**
- ▶ **APPLICATIONS INCLUDE:**
 - SINGLE FAMILY HOMES
 - APARTMENTS
 - MODULAR OR MOBILE
 - SUPPLEMENTAL HEAT ADDITION
 - REMODELS
 - AND MUCH MORE




SELECTION CHART

CATALOG NUMBER	VOLTS	WATTS	BTU/HR	AMPS	LENGTH	SHIP WT. (LBS.)
F25126W	120	500	1706	4.2	2'6"	7.8
F25426W	240/208	500/376	1706/1283	2.1/1.8		
F2513W	120	750	2560	6.3	3'	9.0
F2543W	240/208	750/564	2560/1925	3.1/2.7		
F2514W	120	1000	3413	8.3	4'	11.5
F2544W	240/208	1000/752	3413/2567	4.2/3.6		
F2515W	120	1250	4266	10.4	5'	13.0
F2545W	240/208	1250/940	4266/3208	5.2/4.5		
F2516W	120	1500	5120	12.5	6'	15.5
F2546W	240/208	1500/1128	5120/3850	6.3/5.4		
F2548W	240/208	2000/1504	6826/5133	8.3/7.2	8'	20.0
F25408W	240/208	2500/1880	8533/6416	10.4/9.0	8'	20.0

Accessories


CATALOG NUMBER	DESCRIPTION	CASE QTY.	SHIP WEIGHT (lbs.)
TA2AW	DP Thermostat, rated 22A @ 120-277V 15.5A @ 347V, 10A @ 600V	1	1

FEATURES

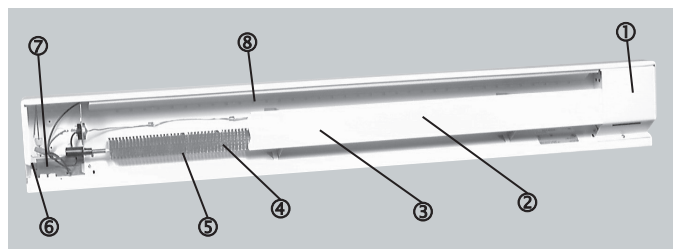

- ① Large wiring compartment and accessible grounding pigtail. Completely pre-wired at both ends
- ② 18 ga. Front Cover and 18 ga. Front Cover support brackets
- ③ Navajo White durable textured polyester powder coat finish
- ④ "Chimney-fin" type element moves air at greater velocity and results in less wall streaking
- ⑤ Suspended heating element designed to lower noise of heater when warming up
- ⑥ "Easy-out" knockouts at each end of heater facilitates fast and easy wire entry and exit from wiring compartments.
- ⑦ Built-in Back entry cable clamp provides access to wiring compartment from rear for fast wiring
- ⑧ Pre-notched guide marks for fast installation.

DIMENSIONS

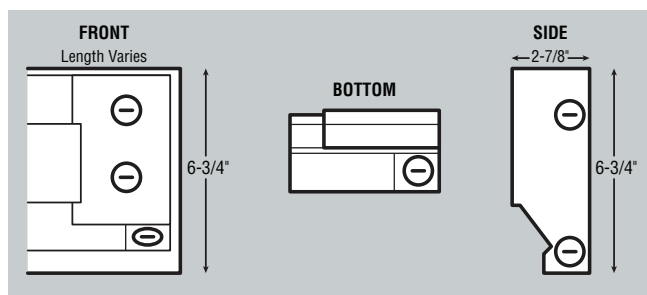

All knockouts are 7/8" diameter for 1/2" conduit