

Great Things Come in Small Packages

RESIDENTIAL FAN-FORCED ZONAL WALL HEATERS

FFC™ SERIES



COMPACT UNIVERSAL DESIGN

- Compact contemporary look
- Ideal for new residential or commercial installations where space is limited
- Adaptable for retrofits into 7 7/8" x 11 1/2" x 4" back box (such as provided with UL-approved FFC and Cadet CS Models) rough-in opening same if new box is desired
- Supplemental heat for any residential and commercial area – perfect for small rooms or spot heating

OPTIMAL WATTAGE AND VOLTAGE

- Dual voltage and wattage ratings help reduce inventory to 3 SKUs
- Voltage selections: 120V, 208V, 240V
- Wattage selections: 750W - 2000W
- Factory wired for full wattage, easily field adjustable for ½ wattage
- ½ Wattage option is permanent change complying with many local electrical requirements

SAFETY STANDARDS COMPLIANT

- Safety Listed by Intertek (ETL) for use in the USA and Canada complying with ANSI/UL2021 and CSA 22.2, NO. 46 Safety Standards
- Dual protection: self-hold limit with one time thermal fuse
- Efficient quiet operation from smooth running multi-layer impeller

EASY INSTALLATION AND MAINTENANCE


- Quick installation with Heater/Fan Assembly fitting to back box by one screw
- Easy service by removing just one screw from the fan panel
- Allows access to impeller and heating element without disturbing any internal wiring or controls

APPLICATIONS:

Basements
Bathrooms
Bedrooms
Hallways
Remodels

Catalog Number	Voltage	240V Wattage	208V Wattage	120V Wattage
FFC2048	240V/208V	2000W/1000W	1500W/750W	n/a
FFC1548	240V/208V	1500W/750W	1125W/570W	n/a
FFC1512	120V	n/a	n/a	1500W/750W

DIMENSIONS

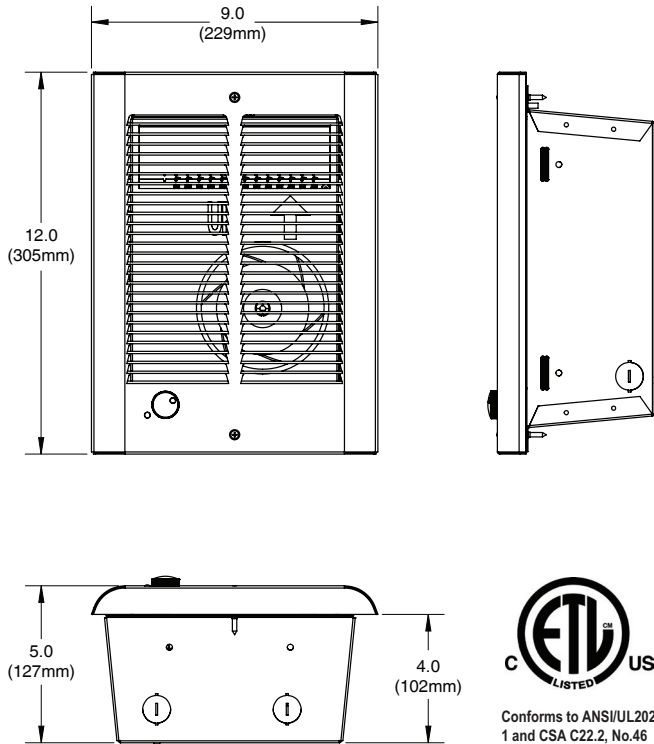

MOUNTING LIMITATIONS

Do not install back box closer than 4.5 inches from floor, adjacent walls and 12 inches from ceiling. Do not install heater behind towel rack, behind door, in floor, in closet, or where airflow may be obstructed. To insure proper operation, maintain 5 feet minimum clearance from furniture or other objects placed directly in front of the heater.

FEATURES

CLIP-N-FIT® - Patented feature (US Patented No. 6,172,343) allows the installer to change the wattage of the heater to a lower output without moving jumper wire. Each heater is factory wired for its maximum wattage. To reduce to half wattage, clip jumper wire on heating element. This patented feature also prevents the operator from changing wattage after installation to a higher wattage.